


First Selection Grade

Grado Primera Selección

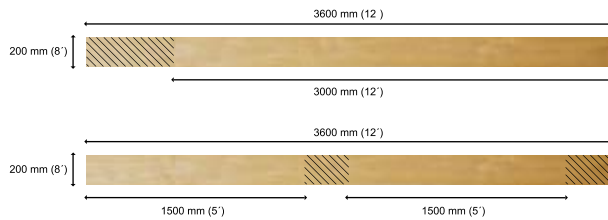

This grade allows to obtain mainly long clear face cuttings free of defects. This lumber is recommended to be used in decorative moldings, door and furniture stiles, tops and any other products that require longer clear pieces. This Lumber is normally placed through a steaming process to homogenize it's color.

Clear surface yield is 83% - 100%, for both sides.

Este grado permite obtener principalmente piezas largas libres de defectos. Esta madera se recomienda utilizar en elementos como molduras decorativas, batientes de puertas, cubiertas y otros donde se requieran piezas largas y sanas. Esta madera es normalmente sometida a un proceso de vaporizado para homogenizar su color.

Rendimiento de superficie limpia es 83% - 100% por ambas caras.



FRONT FACE | CARA FRONTAL

BACK FACE | CARA TRASERA

